




ALTERNATE MESSAGE STRUCTURES (CONTEXT DEFINED) FILENAME=PROCESS IDENTIFICATION FILE EXTENSIONS=CONTROL INSTRUCTION FILE CONTENTS=DATA SET AND/OR DATA POINTERS (CONTENT DEFINED) ANY NUMBER OF LINES IN A ARBITRARY ORDER SOURCE ID: (16 BYTES) DESTINATION ID: (16 BYTES) DATA SET: (AN ARBITRARY NUMBER OF BYTES) FIG. 3 PROGRAM: (AN ARBITRARY NUMBER OF BYTES) SPECIAL INSTRUCTION: (AN ARBITRARY NUMBER OF BYTES); (...);... KEYBOARD EXECUTION: (AN ARBITRARY NUMBER OF BYTES) CONFIRMATION REQUEST: (1 BYTE) RETURN ID: (16 BYTES) RETURN DATA SET: (AN ARBITRARY NUMBER OF BYTES) RETURN ENCRYPTION LEVEL: (1 BYTE) NETWORK CONTROL: (16 BYTES)
DATE: (AN ARBITRARY NUMBER OF BYTES) TIME: (AN ARBITRARY NUMBER OF BYTES) SEQUENCE: (16 BYTES)

FIG. 4



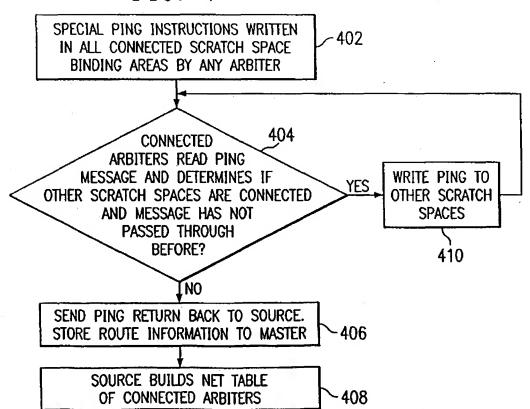

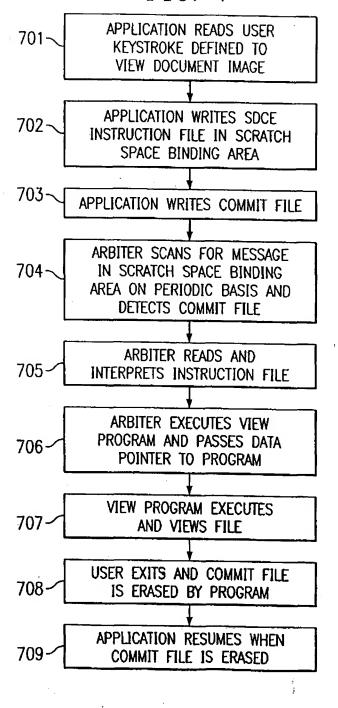

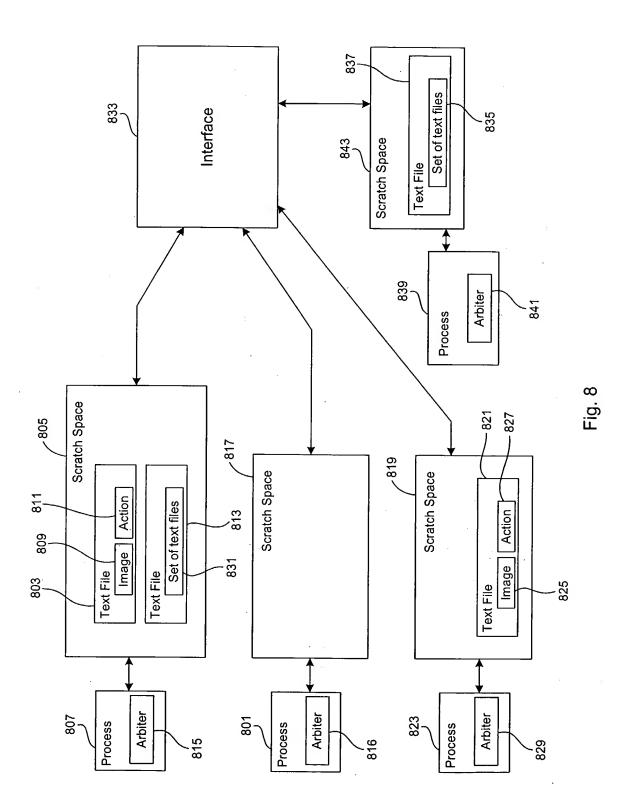

6-10-50-4-1-6